


## FRAMING SIZE 5X CLEAN FACE

NON COMBUSTIBLE SHEETING 13mm FYRCHECK MUST BE FITTED AROUND FIRE

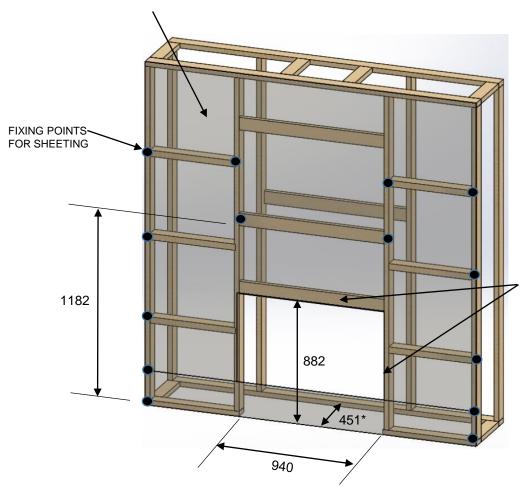

NO FIXING OF SHEETING TO THE HEADER OR NEAREST STUD TO THE FIRE APPLIANCE. USE SELLEY'S 401 SILICON TO ADHERE TO THE NEXT AVAILABLE STUD OR HEADER.

\* WHEN USING CLEAN FACE FRONT ONLY

NOTE: DO NOT CUT SHEETING TO THE OPENING SIZE (882x940) THERE IS AN OVERLAP REQUIRED

32mm X 20mm ANGLE (PAINTED BLACK) TO BE ATTACHED TO THE FRAME OF THE FIREPLACE ADJACENT TO THE OPENING FOR GLASS FRONT. 20mm LEG OF ANGLE TO BE FIXED TO FIRE. TOP OF THE ANGLE TO ALIGN WITH LOUVRE ON TOP OF THE FIRE.

## 5X CLEAN FACE NON COMBUSTIBLE SHEETING

